


# Durulite Retailer

Durulite Retailer Doors are constructed with rotationally molded polyethylene, making them extremely durable and capable of withstanding the wear and tear associated with sales-to-back room openings in high volume retail establishments, and for cooler openings, please refer to our DOE listed R25D.

Durulite Retailer Doors are ideal for use in supermarkets, retail establishments, institutions, restaurants and food service operations as they provide a visual separation, sound barrier and thermal separation.

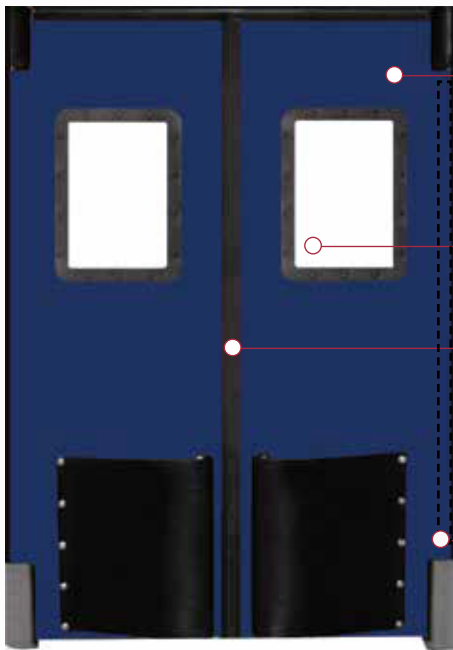

Durulite Retailer shown with optional teardrop bumpers

**Door Panel** – Lightweight, opens easily and closes every time. Overall panel thickness is 1-1/2", skin thickness is 1/8" and the door can be sized up to 8' x 10'. Rotationally molded polyethylene outer skin retains its properties to -40°F.


**Window** – Large polycarbonate windows are scratch resistant. Multiple size Standard or ADA windows are available.

**Gasketing** – Replaceable perimeter edge gasketing is used to reduce energy flow between environments. The door comes standard with gasket along the leading, back and bottom edges. Partially gasketed doors are available.


**Internal Reinforcement** – A 1" diameter hinge post is molded in the door and runs the full length of the panel. The hinge post sets into the jamb guard for structural stability and strength.

## Designs and Colors

Actual color samples should always be requested if color accuracy or matching is key to your decision.

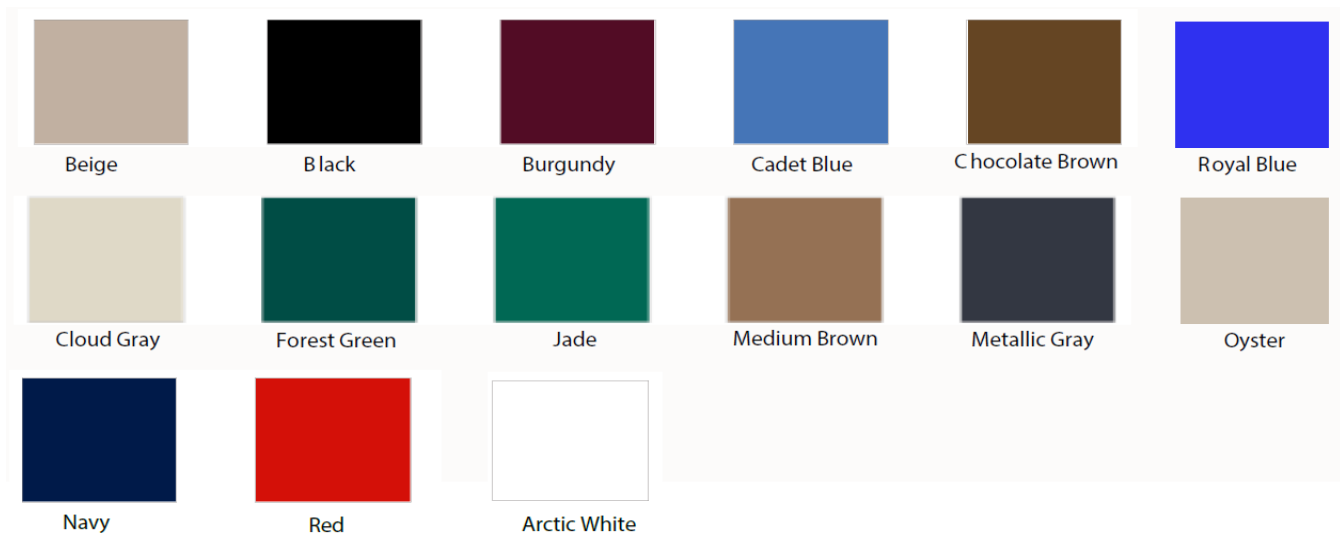


# Durulite Retailer

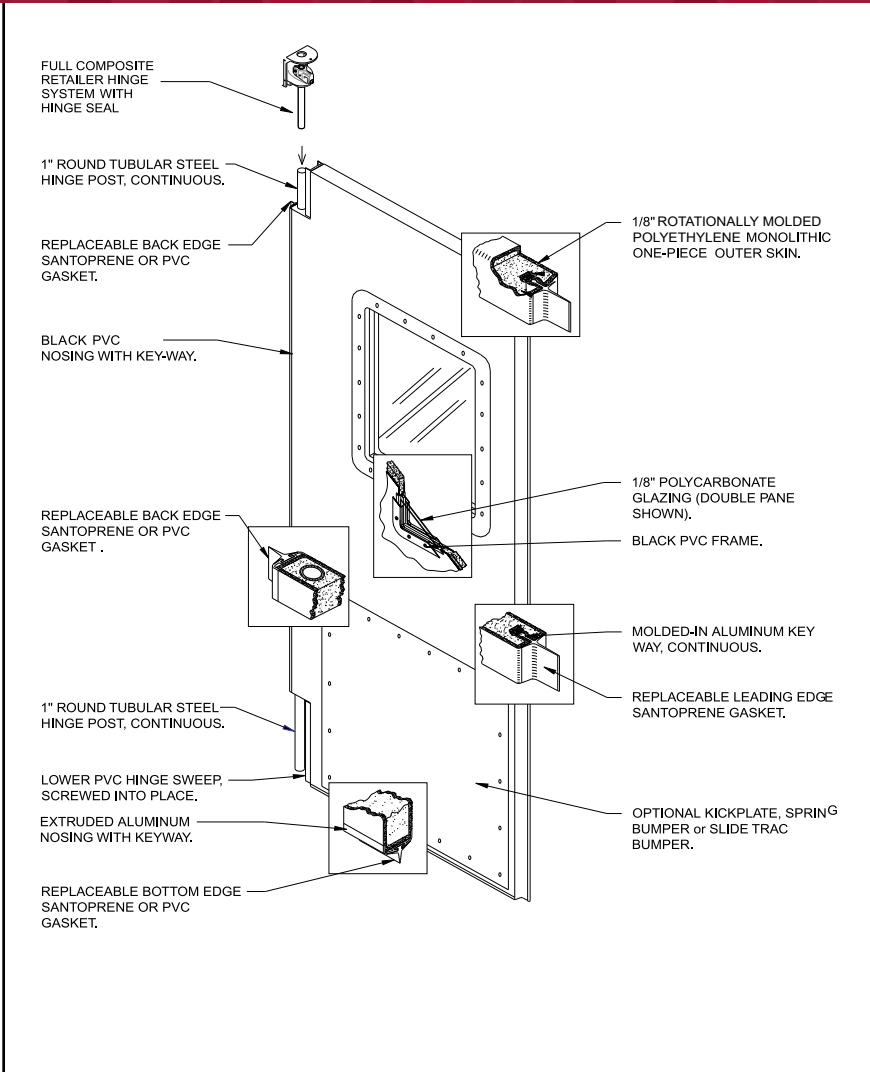

**Insulated Core** – High density, Non-CFC urethane core is foamed-in-place to insure a tenacious bond between the core and outer skin, providing sound abatement and excellent thermal separation with an R factor of 9.86.



**Upper Hinge** – Patented fully composite V-Cam roller assembly resists corrosion and rust and can travel up to 120° in each direction.



**Lower Hinge Assembly** – The lower hinge assembly holds the lower hinge post in position, preventing horizontal movement of the door. It also serves as a lower hinge guard, protecting the lower hinge post from impact damage.

## Applications

- Food Processing
- Institutional
- Retail
- Supermarket
- Food Service

## Environment

- Cooler
- USDA Accepted
- Personnel
- Interior

## Options

- Window Options
- Impact/Kick Plates
- Teardrop Bumpers
- Cart Guards
- SlideTrac Bumpers™



\*only to be used as a secondary door in cold storage applications.